# Did you know surge protectors wear out over time?

Electricians recommend replacing your surge protectors every 2-3 years. We strive to make products that last much longer. That's why we created SurgeSwap™, the sustainable, swappable surge protector. Your 3in1 surge protector is made to outlast, all other surge protectors by letting you replace a single cartridge rather than sending an entire product to the landfill. When the light turns red, there is no longer any surge protection left to your cartridge. We recommend replacing the cardtridge every 2-3 years, before the light actually becomes red, to ensure your equipment remains protected.



Note: Always unplug the cord from the wall before remeoving/reinserting SurgeSwap™ cartridges. The SurgeSwap™ cartridge fits snuggly in the plughead and can be difficult to remove. When inserting a new cartridge, make sure to press it in firmly. If the light isn't green when plugged in, it's possible the cartridge is not fully inserted correctly.

WARRANTY

We, the manufacturer, warrant Charg products to be free from defects in material and workmanship under normal use and service for a

period of one (1) year from the date of manufacture. We will refund the

price of the defective product within the warranty period. If product is

repaired or replaced it will be shipped F.O.B. manufacturer's facility. If we determine to refund the price of the product, we may require that

the product be returned to us before the refund is given. This warranty

shall be voided by any repair altercation, or modification by persons

misuse or neglect of the product by use not in accordance with its

published instructions. The remedies for any failure of the products

to meet its warranty specified herein shall be those remedies stated

herein and no other; these remedies being exclusive remedies as a condition of sale irrespective of the theory upon which any claim might

be based, including negligence, breach of contract or strict liability. In

or personal property outside of the Charg product.

addition, except as provided in this paragraph or to the extent restricted or prohibited by applicable law, the manufacturer makes no warranty expressed or implied, including any warranty of merchantability or fitness for any particular purpose, and you specifically agree that the manufacturer shall not be liable for any special, incidental, indirect. punitive or consequential damages for breach of any warranty of any type on any Charg product. In addition to and without limiting the generality of the foregoing disclaimers, the limited warranty does not, under any circumstances, cover the replacement or cost of any electronic device (including but not limited to any mobile phone devices)

other than the employees of manufacturer, or those who are expressly authorized by manufacturer to make such repairs, and by any abuse.

#### CARE AND CLEANING

To clean, wipe with a damp cloth. If necessary, a mild detergent may be applied to cloth.

#### WARNINGS

NOT FOR OUTDOOR USE

DO NOT DISASSEMBLE

DO NOT PENETRATE UNITS WITH FOREIGN OBJECTS

AVOID STRONG IMPACTS

DO NOT CRUSH

DO NOT SUBMERGE

DO NOT SPRAY UNIT DIRECTLY WITH ANY LIQUID

DO NOT INCINERATE

DO NOT MICROWAVE UNIT, PLACE IN HIGH PRESSURE CONTAINERS OR INDUCTION HEATING DEVICES

KEEP AWAY FROM PETS AND CHILDREN

Failure to comply may cause electrical and/or fire hazards resulting in serious injury.









charg







## V0322 P 800.999.3567 320 Byrne Industrial Drive, Rockford, MI 49341 IS07899 ©2022 Byrne Electrical Specialists, Inc. All Rights Reserved

# 3in1 surge protector

quidebook

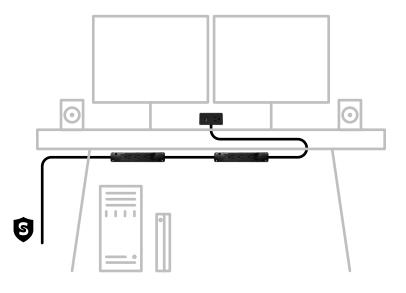









Underneath your table top power unit

of your wall outlet.








units under the desk. Note: Be sure to keep in mind the location



prior to installing velcro. We recommend cleaning with isopropyl alcohol. attach the triplex securely. Note: be sure your surface is clean and dry For veloro installation, use two veloro strips per triplex in order to

the screw holes in the product. Be sure not to over tighten. Or, using the installation screws, screw the triplex units through

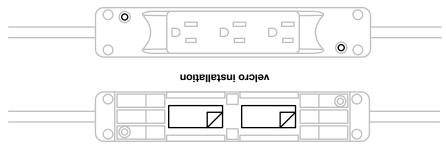


### screw installation

plug end and try removing and reinserting the SurgeSwap<sup>TM</sup> cartridge. green. If the light doesn't appear green when first plugged in, unplug the power banks. Note: When plugged in, the indicator light should turn extra Velcro Strips can help you organize any hanging cords or Plug your kit into your wall outlet. Cord Management Clips and

# congratulations!

these tips and tricks to supercharge your setup. Installation shouldn't be difficult, but read through plugged in with your new 3in1 surge protector. You're one step closer to staying powered up and


### kit components

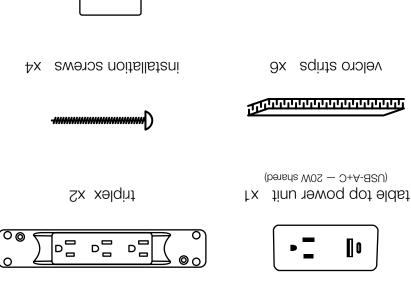

you may need to unplug an item from your accessory. by pressing the button. If the button continues to engage, too much power, the button will engage. Reset the circuit for overcurrent protection. If your accessory is pulling Note: the plughead has a Circuit Breaker Reset Button

cartridge x1

10001 SurgeSwap<sup>IM</sup>



cord management clips x8