

Did you know surge protectors wear out over time?

Electricians recommend replacing your surge protectors every 2-3 years. We strive to make products that last much longer. That's why we created SurgeSwap™, the sustainable, swappable surge protector. Your 2in1 surge protector is made to outlast, all other surge protectors by letting you replace a single cartridge rather than sending an entire product to the landfill. When the light turns red, there is no longer any surge protection left to your cartridge. We recommend replacing the cartridge every 2-3 years, before the light actually becomes red, to ensure your equipment remains protected.



Note: Always unplug the cord from the wall before removing/reinserting SurgeSwap™ cartridges. The SurgeSwap™ cartridge fits snugly in the plughead and can be difficult to remove. When inserting a new cartridge, make sure to press it in firmly. If the light isn't green when plugged in, it's possible the cartridge is not fully inserted correctly.

CARE AND CLEANING

To clean, wipe with a damp cloth. If necessary, a mild detergent may be applied to cloth.

WARNINGS

NOT FOR OUTDOOR USE
DO NOT DISASSEMBLE
DO NOT PENETRATE UNITS WITH FOREIGN OBJECTS
AVOID STRONG IMPACTS
DO NOT CRUSH
DO NOT SUBMERGE
DO NOT SPRAY UNIT DIRECTLY WITH ANY LIQUID
DO NOT INCINERATE
DO NOT MICROWAVE UNIT, PLACE IN HIGH PRESSURE
CONTAINERS OR INDUCTION HEATING DEVICES
KEEP AWAY FROM PETS AND CHILDREN

Failure to comply may cause electrical and/or fire hazards resulting in serious injury.




WARRANTY

We, the manufacturer, warrant Charg products to be free from defects in material and workmanship under normal use and service for a period of one (1) year from the date of manufacture. We will refund the price of the defective product within the warranty period. If product is repaired or replaced it will be shipped F.O.B. manufacturer's facility. If we determine to refund the price of the product, we may require that the product be returned to us before the refund is given. This warranty shall be voided by any repair alteration, or modification by persons other than the employees of manufacturer, or those who are expressly authorized by manufacturer to make such repairs, and by any abuse, misuse or neglect of the product by use not in accordance with its published instructions. The remedies for any failure of the products to meet its warranty specified herein shall be those remedies stated herein and no other; these remedies being exclusive remedies as a condition of sale irrespective of the theory upon which any claim might be based, including negligence, breach of contract or strict liability. In addition, except as provided in this paragraph or to the extent restricted or prohibited by applicable law, the manufacturer makes no warranty expressed or implied, including any warranty of merchantability or fitness for any particular purpose, and you specifically agree that the manufacturer shall not be liable for any special, incidental, indirect, punitive or consequential damages for breach of any warranty of any type on any Charg product. In addition to and without limiting the generality of the foregoing disclaimers, the limited warranty does not, under any circumstances, cover the replacement or cost of any electronic device (including but not limited to any mobile phone devices) or personal property outside of the Charg product.

2in1 surge protector

guidebook

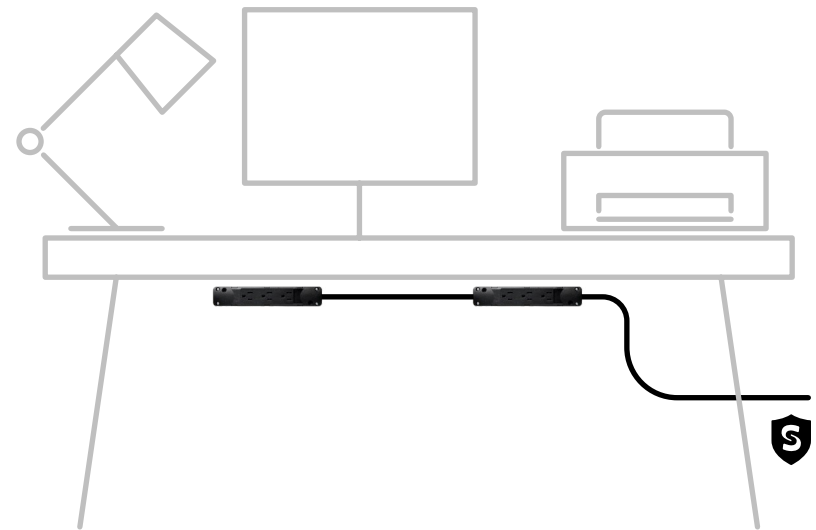

charg™

V0622 P 800.999.3567

320 Byrne Industrial Drive, Rockford, MI 49341


IS07900 ©2022 Byrne Electrical Specialists, Inc. All Rights Reserved

charg™

congratulations!

You're one step closer to staying powered up and plugged in with your new 2-in-1 surge protector. Installation shouldn't be difficult, but read through these tips and tricks to supercharge your setup.

kit components




triplex x2



velcro strips x6




cord management clips x8



1000J SurgeSwap™
cartridge x1



installation screws x4




Note: the plughead has a Circuit Breaker Reset Button too much power, the button will engage. Reset the circuit by pressing the button. If the button continues to engage, you may need to unplug an item from your accessory.

1

Locate where you'd like to mount the Triplex units underneath your desk. Use the included **installation screws** or **velcro strips** to securely mount the Triplex units under the desk. *Note: Be sure to keep in mind the location of your wall outlet.*

For velcro installation, use two **velcro strips** per Triplex in order to attach the Triplex securely. *Note: be sure your surface is clean and dry prior to installing velcro. We recommend cleaning with isopropyl alcohol.*

Or, using the **installation screws**, screw the Triplex units through the screw holes in the product. Be sure not to over tighten.



velcro installation



screw installation

2

Plug your kit into your wall outlet. **cord management clips** and extra **velcro strips** can help you organize any hanging cords or power banks.